


2MT **HEAT** SHIELD™

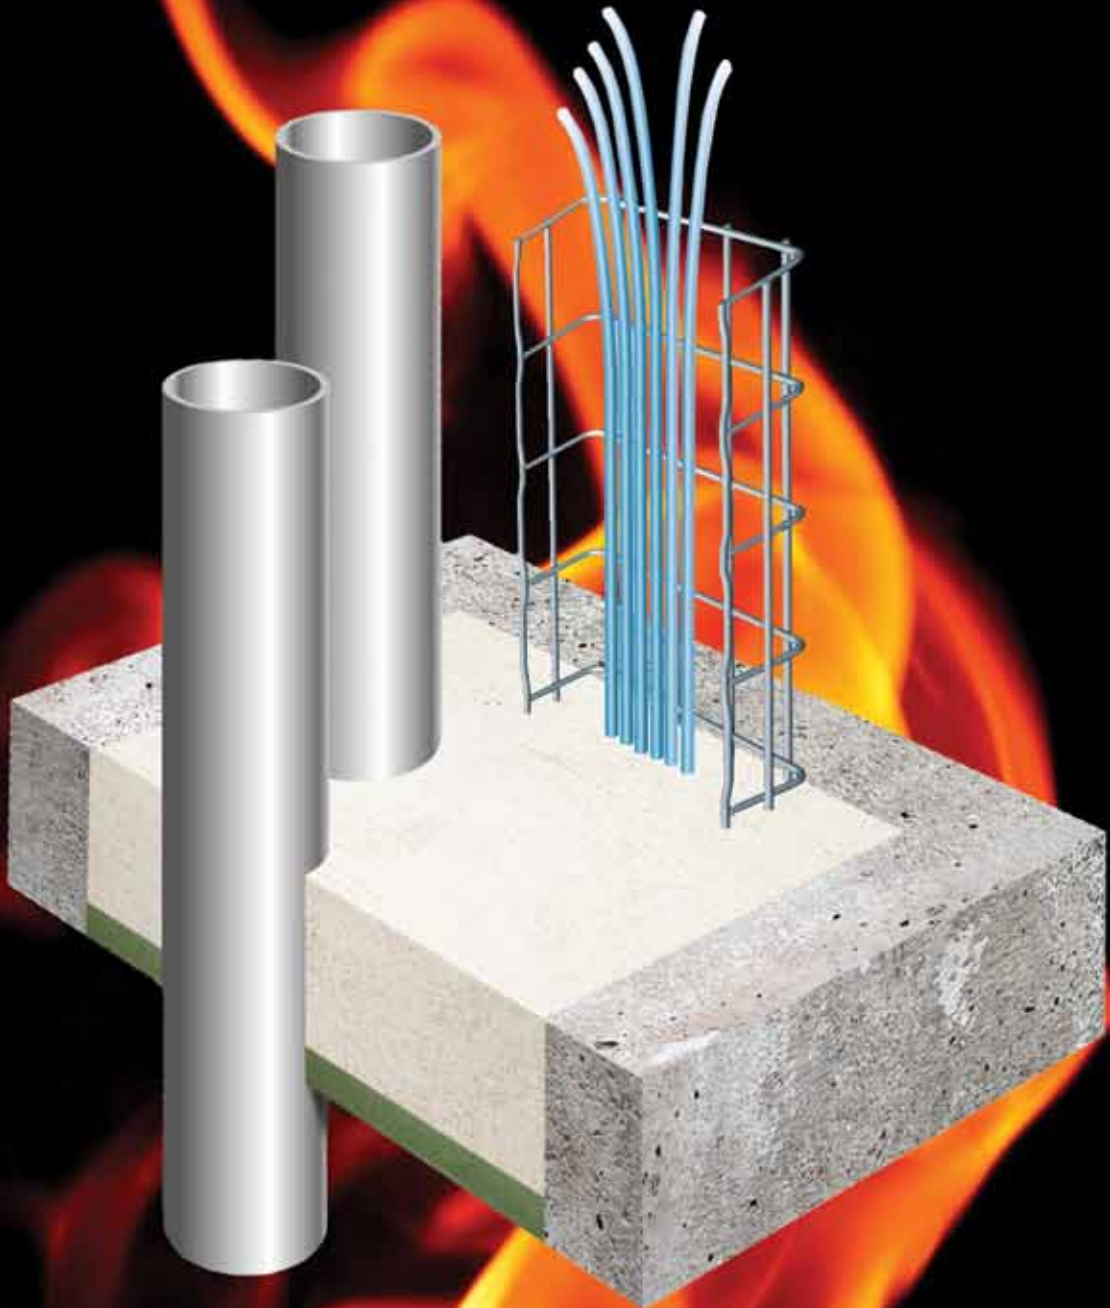

M1150
Fire Stop Mortar Compound

2MT HEATSHIELD - M1150 Fire Stop Mortar

2MT HEATSHIELD M1150 Fire Stop Mortar is designed to restrict the spread of fire and smoke from one compartment to another where electrical and mechanical services penetrate through fire rated separating walls and floors, and can be used to seal complex large apertures.

2MT HEATSHIELD M1150 Fire Stop Mortar is a dry bagged, pre-blended anhydrite based mortar compound which provides excellent fire resistance properties. Comprehensively tested in accordance with BS EN 1366-3, BS476 pt 20, AS1530-3 and other International Standards.

2MT HEATSHIELD M1150 Fire Stop Mortar is an extremely versatile and cost effective solution for a wide range of complex fire stop requirements, and is easily installed using basic hand tools. The dry powder is simply mixed with clean water to achieve the required consistency and is either poured in situ or trowel applied dependent on site requirements.

- Up to 4 Hrs Fire Resistance.
- Comprehensively tested and assessed by independent authorities in accordance with BS EN 1366-3 , BS476 pt 20, AS1530-3 for up to 4 Hours fire resistance.
- Suitable for a wide range of applications.
- Can be used together with other products in the **2MT HEATSHIELD** range as part of a flexible system for complex fire stop needs.
- Labour saving / easy installation.
- Suitable for use in Concrete floors.

2MT HEATSHIELD M1150 Fire Stop Mortar is suitable for use in any building which has services penetrating through fire rated compartment walls and floors.

These include:

Apartment blocks, Hotels, Hospitals, Schools, Prisons, Airport Terminals, Shopping Malls, etc.

For Installation details please refer to relevant technical data sheets.

As part of our policy of on-going product development and testing, we reserve the right to modify, alter or change product specifications without giving notice. All information contained in this document is given in good faith and is provided for guidance only. As 2M Trading Ltd has no control over the methods or competence of installation, or of prevailing site conditions, no warranties, expressed or implied, are intended to be given as to the actual performance of the products mentioned or referred to herein and no liability whatsoever will be accepted for any loss, damage or injury arising from the use of the information given.

How does **HEATSHIELD M1150** Fire Stop Mortar work?

When exposed to the elevated temperatures of a fire situation **2MT HEATSHIELD M1150** Fire Stop Mortar provides excellent thermal performance and this insulating property provides a resilient barrier and prevents the spread of fire and hot gases from one compartment to another.

Other **2MT HEATSHIELD** Products

2M Trading Ltd is partnering with NFEL (Northern Fire Engineering Ltd) in supplying a range of **HEATSHIELD** fire protection products which provide designers and services engineers with choices & solutions to most passive fire protection problems.

- Fire Rated Putty Pads for electrical socket box protection in drywall.
- A range of Fire Rated Acrylic , Silicone and Graphite based Sealants.
- Fire Rated Pillows for complex multi-service penetrations.
- Fire Rated Collars and Wraps for Plastic Pipes.
- Fire Rated Cable Coatings for the protection of electrical cables.
- Fire Rated Coated Boards for complex service penetrations.

Your local supplier is:



2MTrading Ltd

Unit 3 Laurencekirk Business Park,
Laurencekirk, AB30 1EY

Telephone: +44 (0)1561 377993

Email: sales@2mt.co.uk